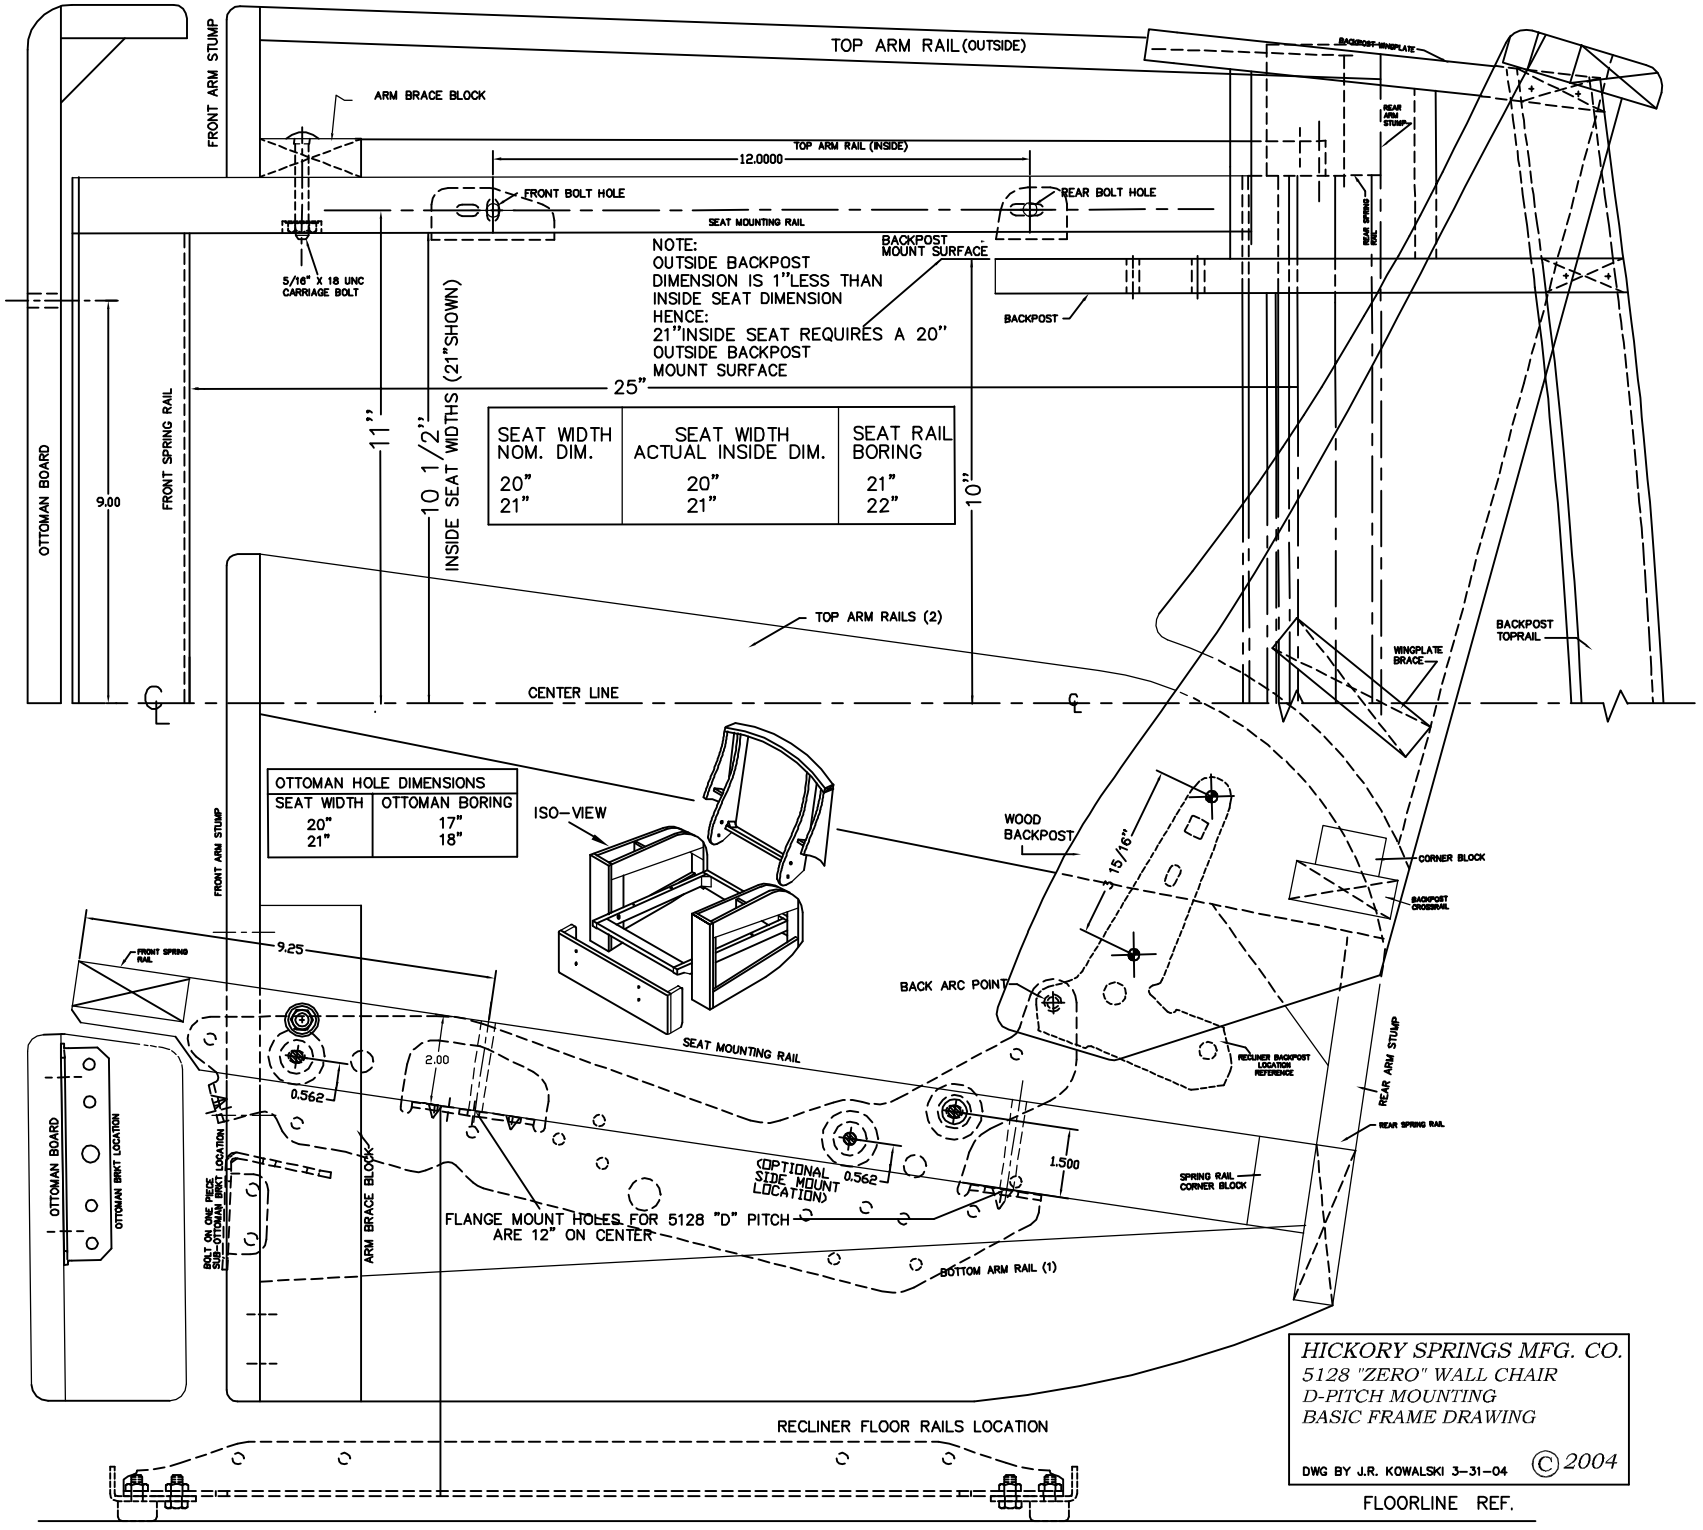
TOP ARM RAIL(OUTSIDE)
FRONT ARM STUMP
ARM BRACE BLOCK
TOP ARM RAIL (INSIDE)
12.0000
FRONT BOLT HOLE
REAR BOLT HOLE
SEAT MOUNTING RAIL
5/16" X 18 UNC CARRIAGE BOLT
NOTE:
OUTSIDE BACKPOST DIMENSION IS 1"LESS THAN INSIDE SEAT DIMENSION
HENCE:
21"INSIDE SEAT REQUIRES A 20" OUTSIDE BACKPOST MOUNT SURFACE
BACKPOST MOUNT SURFACE
BACKPOST
25"
11"
10 1/2" INSIDE SEAT WIDTHS (21"SHOWN)
10"
9.00
OTTOMAN BOARD
FRONT SPRING RAIL
SEAT WIDTH NOM. DIM. | SEAT WIDTH ACTUAL INSIDE DIM. | SEAT RAIL BORING
20" | 20" | 21"
21" | 21" | 22"
TOP ARM RAILS (2)
CENTER LINE
BACKPOST TOPRAIL
WINGPLATE BRACE
OTTOMAN HOLE DIMENSIONS
SEAT WIDTH | OTTOMAN BORING
20" | 17"
21" | 18"
ISO-VIEW
WOOD BACKPOST
15/16"
CORNER BLOCK
BACKPOST CROSSRAIL
FRONT ARM STUMP
9.25
FRONT SPRING RAIL
BACK ARC POINT
RECLINER BACKPOST LOCATION REFERENCE
REAR ARM STUMP
REAR SPRING RAIL
SEAT MOUNTING RAIL
2.00
0.562
OTTOMAN BOARD
OTTOMAN BRKT LOCATION
BOLT ON ONE PIECE SUB-OTTOMAN BRKT
ARM BRACE BLOCK
(OPTIONAL SIDE MOUNT LOCATION)
0.562
1.500
SPRING RAIL CORNER BLOCK
FLANGE MOUNT HOLES FOR 5128 "D" PITCH ARE 12" ON CENTER
BOTTOM ARM RAIL (1)
RECLINER FLOOR RAILS LOCATION
FLOORLINE REF.
HICKORY SPRINGS MFG. CO.
5128 "ZERO" WALL CHAIR
D-PITCH MOUNTING
BASIC FRAME DRAWING
DWG BY J.R. KOWALSKI 3-31-04
© 2004